



# Hyperion Rhodamine

Teledyne Valeport's Hyperion Rhodamine sensor delivers high performance measurements of Rhodamine in a compact & robust package ideal as a standalone sensor, for ROV and AUV integration or used as part of a multi-sensor array and data logger.

Offered as standard in a 6,000 m depth rated, titanium housing the Hyperion Fluorometer has a wide range (9-28 V DC) isolated power supply, data output up to 16 Hz and RS232, RS485 and Modbus RTU communication protocols. Hyperion offers an industry leading dynamic range with no adjustment of gain settings required.

Hyperion Fluorometers can be supplied in a more rugged form that includes Acetal protection rings, a shaped anti-snag connector cover and a Kevlar weave protected cable.

## DATA SHEET

### Product Details



OPTICAL




CONFIGURE  
SOFTWARE

Sensor Specification	
	Rhodamine*
Excitation	520 nm
Detection	650 nm
Dynamic Range	0-1 000 ppb
Minimum Detection (3x SD in RO water)	0.01 ppb
Linearity	0.99 R <sup>2</sup>
Response Time	0.03 - 2 sec
Output Rate	0.5 Hz to 16 Hz (free running) software controlled


\* Calibrated against Rhodamine WT solution of varying concentrations

Physical	
Materials	Titanium with glass window
Depth Rating	6,000 m
Dimensions	Ø40 mm x 179.5 mm (including connector)
Weight	0.50 kg (in air) 0.26 kg (in water)
Operating Temperature	-5°C to 35°C (the sensor is damaged above 60°C)

#### Dimensions - Standard Hyperion

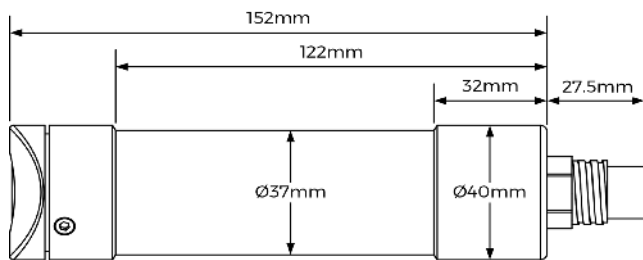

#### Dimensions - with optional Sensor Guard

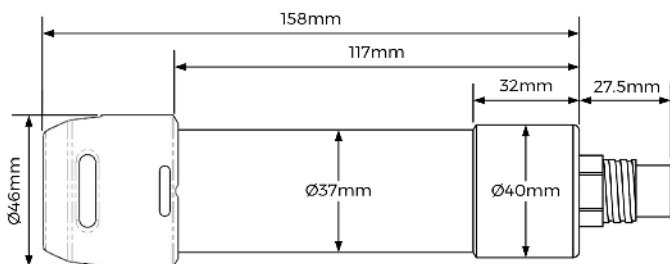

Electrical	
External	9 – 28 V DC Isolated
Power	<600 mW
Connector	SubConn MCBH6F

Communications	
The instrument will operate in real time, with set up performed by direct communications with a PC before deployment.	
RS232   RS485	2400 - 230400 baud rate 8 data bits   1 stop bit   No Parity   No Flow Control
USB	Supplied cable and converter (RS232 to USB)
RS485 Modbus RTU (standard)	19200 baud rate 8 data bits   1 stop bit   Even Parity   No Flow Control

Software	
System is supplied with Configure Windows based PC software for instrument set up.	

Ordering	
0901009 - F3	Hyperion Rhodamine instrument
	Supplied with: <ul style="list-style-type: none"> <li>• Y lead</li> <li>• Manual and transit case</li> <li>• Configure Software</li> </ul>
0901EA2	Hyperion to EnviroLog System interface cable (various lengths available)
0901251	Sensor Guard

#### Datasheet Reference: Hyperion Rhodamine | December 2024

As part of our policy of continuing development, Teledyne Valeport Ltd. reserve the right to alter at any time, without notice, all prices, specifications, designs and conditions of sale of all equipment - Teledyne Valeport Ltd © 2024