



SWiFT SVPplus Fluorescein

Multi-parameter profiler

Valeport's SWiFT SVPplus Multi-Parameter Profiler with a Fluorescein sensor combines survey-grade sound speed, temperature and pressure sensor technology with Fluorometer observations. The package is completed with the convenience of **Bluetooth®** wireless technology, rechargeable battery and an integral GNSS module to geo-locate each profile.

- Multi-Parameter Profiler
 - CTD, Sound Speed, Salinity, Density
 - Up to 32Hz sampling rate
 - Fluorescein sensor
- Bluetooth and USB connectivity
- Integral GNSS receiver for geo-location of profile and time synchronisation
- Rechargeable Lithium-ion Battery
- Dedicated PC software and iOS or Android App

Valeport's Hyperion Fluorometer sensor range, when combined with SWiFT, delivers high performance measurements of Fluorescein in a compact & robust package.

DATA SHEET

Product Details



MULTI-PARAMETER CTD



SOUND SPEED



OPTICAL



OCEAN & CONNECT PATHWAY EDITION SOFTWARE



USB



Rechargeable Battery



GNSS

Valeport Limited
St. Peters Quay, Totnes,
Devon TQ9 5EW United Kingdom

+44 1803 869292
sales@valeport.co.uk
www.valeport.co.uk



Sensor Specification

Flourescein*

Excitation	470 nm
Detection	545 nm
Dynamic Range	0-500 ppb 2 gain settings: 0-25, 0-500 software controlled
Minimum Detection (3x SD in RO water)	<0.01 ppb
Linearity	0.99 R ²
Response Time	0.03 - 2 sec
Output Rate	0.5 Hz - 32 Hz (free running) software controlled

Conductivity

Range	0 - 80 mS/cm
Resolution	0.001 mS/cm
Accuracy	±0.05 mS/cm

Temperature (Platinum Resistance Thermometer)

Range	-5°C – +35°C
Resolution	0.001°C
Accuracy	±0.01°C

Pressure (Temperature compensated piezo-resistive pressure transducer)

Range	50 Bar
Resolution	0.001% FS
Accuracy	±0.01% FS

Sound Velocity (Digital time of flight sensor)

Range	1375 – 1900 m/s
Resolution	0.001 m/s
Accuracy	±0.02 m/s

Salinity#

Range	0 - 42 PSU
Resolution	0.001 PSU
Accuracy	±0.05 PSU

Density#

Range	990 - 1035 kg/m ³
Resolution	0.001 kg/m ³
Accuracy	±0.05 kg/m ³

*Calibrated against Flourescein/Rhodamine solution.

#Calculated Accuracies. Calculations based on Valeport's proprietary DASH formula.

Physical dimensions

Materials	Housing: Titanium Sinkers weight: Stainless steel Optical window: Sapphire glass
Depth rating	500 m
Dimensions	Ø78 mm x Length 307 mm (with sinker weight)
Weight	2.7 kg (in air) / 1.7 kg (in water) including optional sinker weight

Communications (set-up and data offload)

USB Serial	
Bleutooth v4	Low energy

Electrical

Battery	SWiFT Battery endurance depends on the sampling scenario used – contact Valeport for more information. 100 days endurance 2 profiles per day to 100 m* 42 days - 3 profiles a day to 500 m* 2 days continuous running (normal power mode) (*Utilising Bluetooth Sleep mode)
Charging	USB - Supplied mains AC adapter


Software

iOS and Android Valeport Connect Pathway Edition for Bluetooth compatible mobile devices – instrument set up, data offload, display and translation to common data formats. Valeport's Ocean PC software, with both USB cable and Bluetooth connectivity, for instrument setup, data extraction, display and translation to common data formats.

Instrument and data time is synchronised to GNSS, UTC.

Ordering

0660047-50-FF	SWiFT SVPplus profiler with Flourescein sensor 500m rated
Supplied with	PC Bluetooth adapter USB interface and charging cable 1.5 A charger Valeport Ocean software Operating manual System transit case

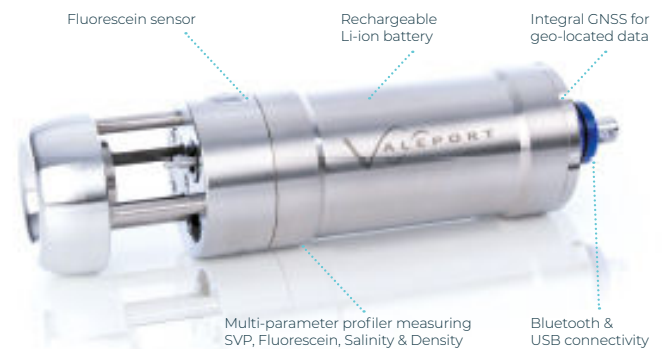

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Valeport Ltd is under license. Other trademarks and trade names are those of their respective owners.

Datasheet Reference: SWiFT SVPplus Flourescein | April 2024

As part of our policy of continuing development, Valeport Ltd. reserve the right to alter at any time, without notice, all prices, specifications, designs and conditions of sale of all equipment - Valeport Ltd © 2024

